




[www.zygon.ca](http://www.zygon.ca)

[info@zygon.ca](mailto:info@zygon.ca)

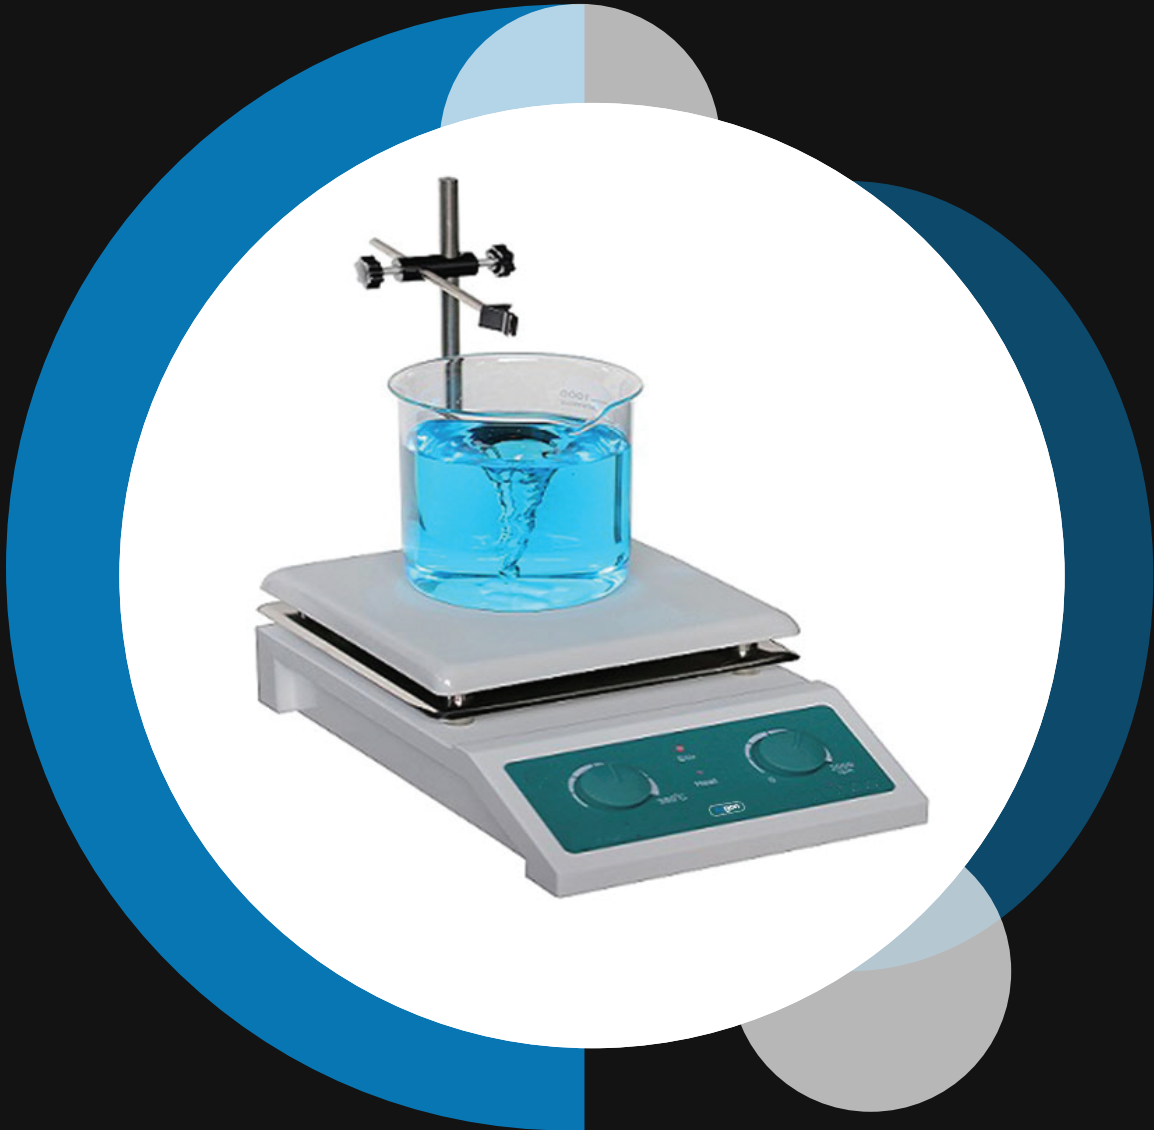

# ZMS-200 ADH

## MAGNETIC STIRRER



## Magnetic Stirrer

- Stretched shell and cover prevents leaking.
- Heating and stirring can proceed simultaneously.
- Temperature setting is precise. And stirring speed stepless is adjustable.
- With speed switch to start or stop stirring at any time.
- Timing function (0-9999min), time adjustable under artificial requirement. Audible and visual alarm equipped.
- Double sensors: Outer PT100 temperature sensor to control liquid temperature precisely, inner K model sensor to control hot plate temperature.
- One key to shift inside and outside sensor easily and precisely.
- Large screen LCD display can indicate temperature, rotational speed and timing at the same time.

### Specifications

### ZMS-200 ADH

Mode	Digital + Heating + Stirring
Max. Volume (ml)	5000
Speed (R.P.M)	200~2000
Working time	Continuous
Minimum revolution (R.P.M.)	200
Max. Temperature (°C )	350
Exterior	Iron plate welding, surface spraying
Heating plate	Ceramic Coated

Driving mode	Motor
Motor power (W)	20
Heating power (kW)	0.6
Stir bar	PTFE
Continuous operation	Yes
Setting mode	Digital
Speed display mode	Digital
Timer	Yes
Operation function	Yes
Sensor	PT100
Exterior size(WxLxH)	320 × 190 × 125mm
Packing size(WxLxH)	390 × 240 × 230mm
Plate size(mm)	190 × 190
Plate load	10kg
Power supply (50/60Hz) Current rating	110V or 220V
NW/GW (kg)	5/6