





www.zygon.ca

info@zygon.ca

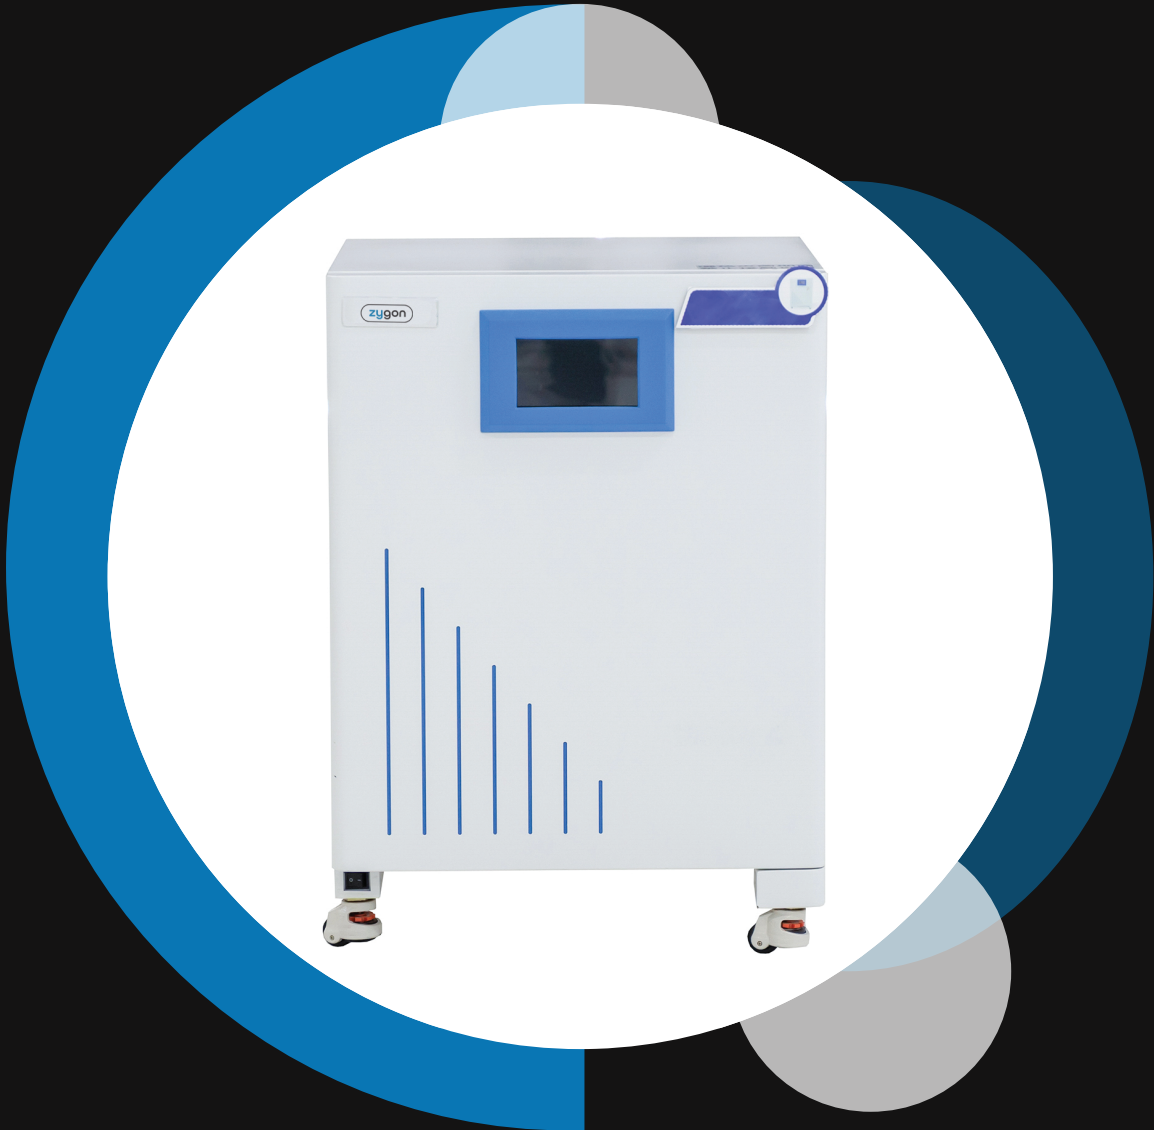

ZXI-100 CCA

CO2 INCUBATOR

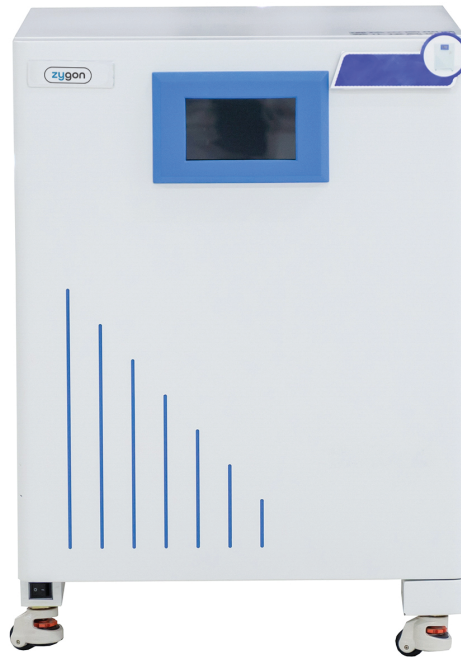

Specifications

ZXI-100 CCA

Capacity (L)	50
Heating	Air jacket
Temp. Range	RT +5 ~ 60°C
Control Type	Temperature and humidity transmitter
Temp. Fluctuation	$\leq \pm 0.2^{\circ}\text{C}$ (at 37°C)
Temp. Uniformity	$\leq \pm 0.3^{\circ}\text{C}$ (at 37°C)
Time Setting	999h or continuous
Alarm	Audible and visual alarm; Over-temperature alarm; CO2 Concentration alarm.
Shelves	2 pcs/adjustable
Material	External cold-rolled steel with painting; internal stainless steel
Door	With inner door and external door
CO2 Range	Infrared sensor, range 0~20%
CO2 Control Resolution	0.10%
Humidification Type	Water Reservoir in the bottom chamber ensures high humidity (90% \leq relative humidity \leq 99%)

Sterilization Type	With 90°C moist heat decontamination function (95%≤humidity≤99%RH)
Ambient Temp. & Humidity	18~30°C, suggest 25±2°C; relative humidity ≤80%
Caster	Footmaster caster
Consumption	350W
Power Supply	AC110/220V±10%, 50/60Hz
Internal Size (W*D*H)	338 × 392 × 442 (mm)
External Size (W*D*H)	575 × 632 × 830 (mm)
Packing Size (W*D*H)	655 × 713 × 1070 (mm)
Gross Weight (kg)	85